


## 6-in-1 Microinverter

MX3300D/3000D/2700D/2500D/2400D

TSUN 6-in-1 Microinverter (Daisy Chain) is a high-efficiency microinverter that uses a hand-in-hand series connection and is designed for larger-scale solar systems. Through the Daisy Chain connection method, this microinverter can effectively reduce wiring complexity and improve system flexibility and scalability.

[DATASHEET](#)

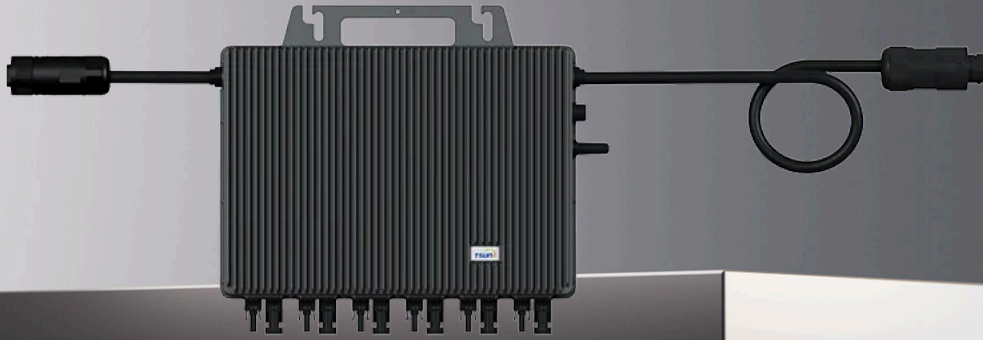


[Home](#) > [Products](#) > [Microinverter](#) > [GEN3 Microinverter \(Daisy Chain\)](#) > [6-In-1 Microinverter](#)

**More Safety**  
with Low-voltage


**60V**

**High Efficiency**  
**97%**

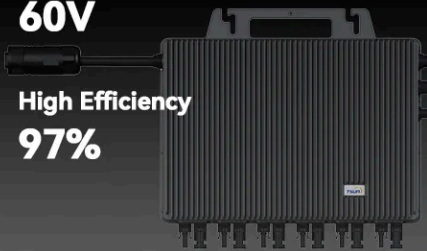

Variable Power Rang  
**2400W-3300W**

**Plug&Play**  
with Hand-in-hand Connection

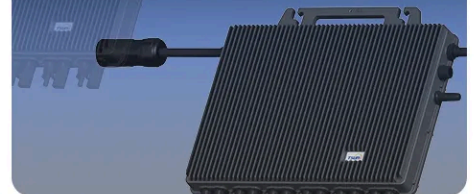

**12**  
Year

Warranty

**25**  
Year

Long  
Lifespan



**EMC Certification**  
German VDE Laboratory



Built-in  
**WiFi/Bluetooth**  
**Tsun Smart App**



## 6-in-1 Microinverter (Daisy Chain)





TSUN 6-in-1 microinverter (Daisy Chain) is a high-efficiency microinverter designed for large-scale solar systems. It uses Daisy Chain hand-in-hand connection technology and can connect up to six solar panels. The maximum output power can reach 3300W, and the peak conversion efficiency is as high as 97.0%. This design ensures that users can effectively increase the overall power generation capacity of the solar system within a limited space. The plug & play design of the TSUN 6-in-1 microinverter (Daisy Chain) greatly simplifies the installation process. Users can easily complete component connections and put them into use quickly without professional installation knowledge, significantly reducing installation time and Labor costs. The connection method of Daisy Chain reduces the complexity of wiring and space occupation, improves the flexibility and scalability

energy output.

## Technical Data

Item	MX2400D	MX2500D	MX2700D	MX3000D	MX3300D
Recommended Module Power [W]	300-600+	300-600+	300-600+	300-600+	400-700+
MPPT Voltage Range per Input [V]	16-60	16-60	16-60	16-60	16-60
Max. Input Voltage per Input [V]	60	60	60	60	60
Max. Input Current per Input [A]	18	18	18	18	18
Short-circuit Current per Input [A]	25	25	25	25	25
Nominal Continuous Output Power [W]	2400	2500	2700	3000	3300
Dimensions [WxHxD mm]	380 * 309 * 49				
Weight [kg]	8.2				

## What's in the box?



## Online Message

We will manage and protect the privacy of the personal informat

Name

\*Please enter the contact person's name

MORE SAFETY MORE POWER

\*Please enter your email address

**Telephone**

\*Please enter the contact phone number

**Message Content**

\*Please enter the message content

SUBMIT



Subscribe to our latest information

Enter your email address



Copyright © 2025 Headquarters TSUNESS Co., Ltd. All Rights Reserved. Sitemap | Privacy Policy